



## Specification

- Input Voltage: 12VDC
- Max Capacity: 660lbs (3000N)
- Cycle: 10%
- Operation Temperature: -20°C +65°C
- Noise Level: ≤50dB
- Speed: 5mm/s
- Standard Stroke : 6inch
- Color: Silver
- Waterproof Rating: IP65

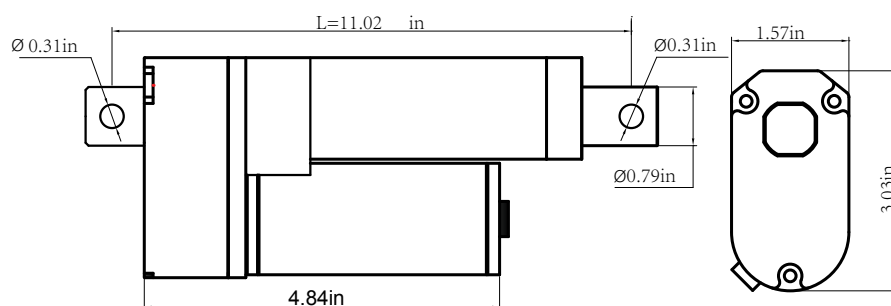

## Receiver and Remote Control

- Input: DC 12V,
- Output: DC 12V
- Mode: Latched, Locked, Momentary
- Frequency: 433.92MHz
- Distance: 20M
- Current: < 8A

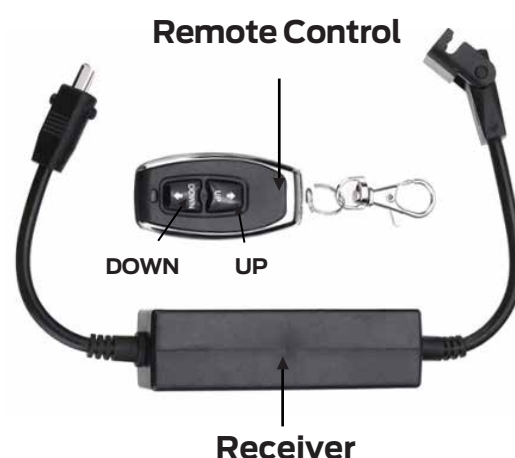

## Manual

**1** Pair remote control and receiver:

- Press any key on the remote control.
- Connect the power wire of receiver and turn it on.
- Press the red button on the receiver
- Press and hold any key on the remote control for 3 seconds, it is paired with receiver

**2** Unpair remote control and receiver:

- Press and hold the red button on receiver for 10 seconds to unpair remote control

**3** To ensure the remote control working distance, please keep the receiver away from interference source.

**4** Please connect DC 12V power with the receiver.


**5** The rated cycle is 10%, which means the linear actuator needs a break for 18 minutes for 2 working minutes.

**6** These are DC linear actuators. When the power wires are reversed, the moving direction is reversed as well.

**7** Please do not overload the linear actuators more than its maximum capacity.


Specification

- Input Voltage: 12VDC
- Max Capacity: 660lbs (3000N)
- Cycle: 10%
- Operation Temperature: -20℃ +65℃
- Noise Level: ≤50dB
- Speed: 5mm/s
- Standard Stroke : 8inch
- Color: Silver
- Waterproof Rating: IP65

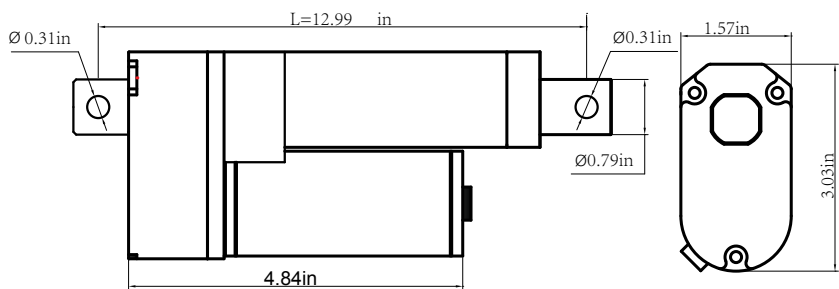

Receiver and Remote Control

- Input: DC 12V,
- Output: DC 12V
- Mode: Latched, Locked, Momentary
- Frequency: 433.92MHz
- Distance: 20M
- Current: < 8A

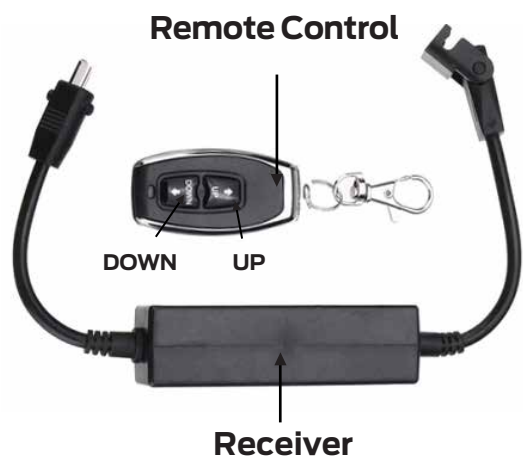


Manual

- 1 Pair remote control and receiver:
  - Press any key on the remote control.
  - Connect the power wire of receiver and turn it on.
  - Press the red button on the receiver
  - Press and hold any key on the remote control for 3 seconds, it is paired with receiver
- 2 Unpair remote control and receiver:
  - Press and hold the red button on receiver for 10 seconds to unpair remote control
- 3 To ensure the remote control working distance, please keep the receiver away from interference source.
- 4 Please connect DC 12V power with the receiver.
- 5 The rated cycle is 10%, which means the linear actuator needs a break for 18 minutes for 2 working minutes.
- 6 These are DC linear actuators. When the power wires are reversed, the moving direction is reversed as well.
- 7 Please do not overload the linear actuators more than its maximum capacity.

Specification

- Input Voltage: 12VDC
- Max Capacity: 660lbs (3000N)
- Cycle: 10%
- Operation Temperature: -20℃ +65℃
- Noise Level: ≤50dB
- Speed: 5mm/s
- Standard Stroke : 10inch
- Color: Silver
- Waterproof Rating: IP65

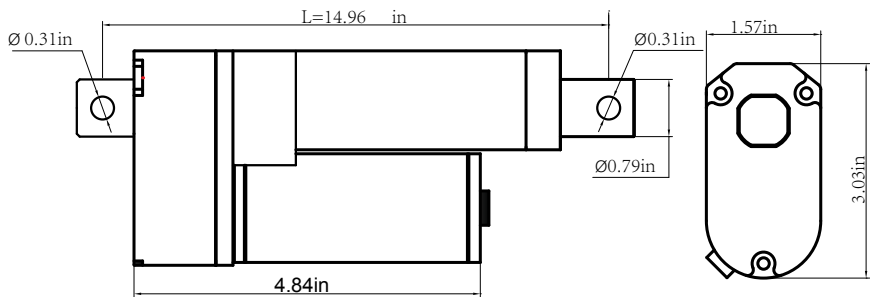

Receiver and Remote Control

- Input: DC 12V,
- Output: DC 12V
- Mode: Latched, Locked, Momentary
- Frequency: 433.92MHz
- Distance: 20M
- Current: < 8A



Manual

1 Pair remote control and receiver:

- Press any key on the remote control.
- Connect the power wire of receiver and turn it on.
- Press the red button on the receiver
- Press and hold any key on the remote control for 3 seconds, it is paired with receiver

2 Unpair remote control and receiver:

- Press and hold the red button on receiver for 10 seconds to unpair remote control

3 To ensure the remote control working distance, please keep the receiver away from interference source.

4 Please connect DC 12V power with the receiver.


5 The rated cycle is 10%, which means the linear actuator needs a break for 18 minutes for 2 working minutes.

6 These are DC linear actuators. When the power wires are reversed, the moving direction is reversed as well.

7 Please do not overload the linear actuators more than its maximum capacity.


Specification

- Input Voltage: 12VDC
- Max Capacity: 660lbs (3000N)
- Cycle: 10%
- Operation Temperature: -20℃ +65℃
- Noise Level: ≤50dB
- Speed: 5mm/s
- Standard Stroke : 12inch
- Color: Silver
- Waterproof Rating: IP65

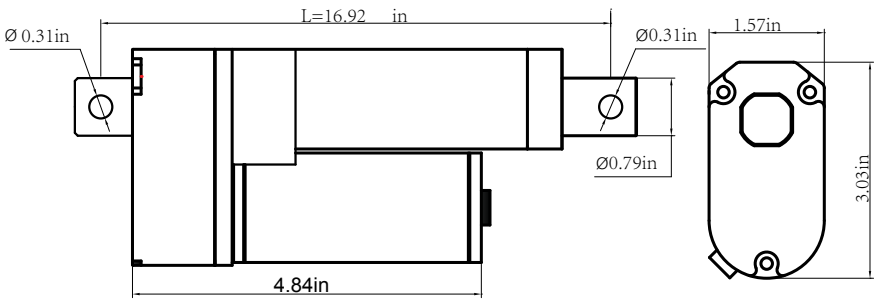

Receiver and Remote Control

- Input: DC 12V,
- Output: DC 12V
- Mode: Latched, Locked, Momentary
- Frequency: 433.92MHz
- Distance: 20M
- Current: < 8A

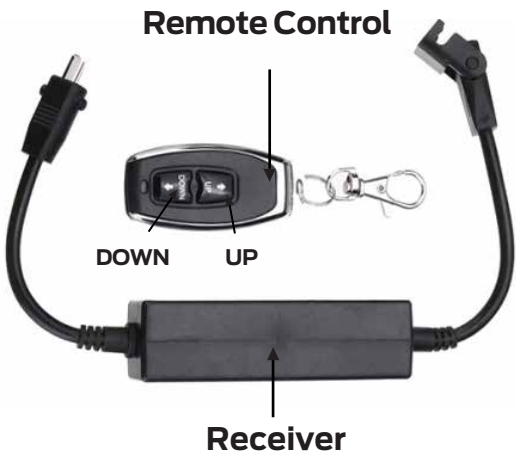


Manual

- 1 Pair remote control and receiver:
  - Press any key on the remote control.
  - Connect the power wire of receiver and turn it on.
  - Press the red button on the receiver
  - Press and hold any key on the remote control for 3 seconds, it is paired with receiver
- 2 Unpair remote control and receiver:
  - Press and hold the red button on receiver for 10 seconds to unpair remote control
- 3 To ensure the remote control working distance, please keep the receiver away from interference source.
- 4 Please connect DC 12V power with the receiver.
- 5 The rated cycle is 10%, which means the linear actuator needs a break for 18 minutes for 2 working minutes.
- 6 These are DC linear actuators. When the power wires are reversed, the moving direction is reversed as well.
- 7 Please do not overload the linear actuators more than its maximum capacity.

Specification

- Input Voltage: 12VDC
- Max Capacity: 660lbs (3000N)
- Cycle: 10%
- Operation Temperature: -20℃ +65℃
- Noise Level: ≤50dB
- Speed: 5mm/s
- Standard Stroke : 18inch
- Color: Silver
- Waterproof Rating: IP65

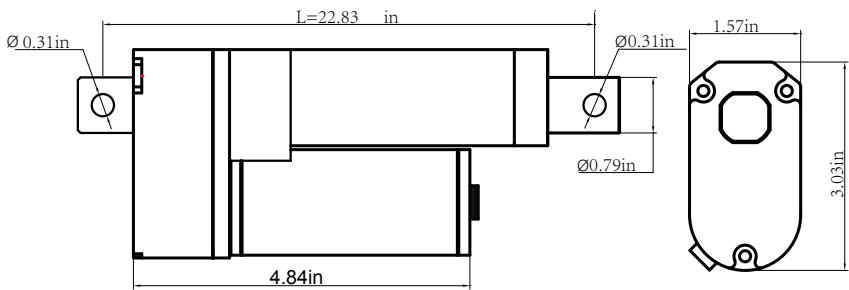

Receiver and Remote Control

- Input: DC 12V,
- Output: DC 12V
- Mode: Latched, Locked, Momentary
- Frequency: 433.92MHz
- Distance: 20M
- Current: < 8A



Manual

- 1 Pair remote control and receiver:
  - Press any key on the remote control.
  - Connect the power wire of receiver and turn it on.
  - Press the red button on the receiver
  - Press and hold any key on the remote control for 3 seconds, it is paired with receiver
- 2 Unpair remote control and receiver:
  - Press and hold the red button on receiver for 10 seconds to unpair remote control
- 3 To ensure the remote control working distance, please keep the receiver away from interference source.
- 4 Please connect DC 12V power with the receiver.
- 5 The rated cycle is 10%, which means the linear actuator needs a break for 18 minutes for 2 working minutes.
- 6 These are DC linear actuators. When the power wires are reversed, the moving direction is reversed as well.
- 7 Please do not overload the linear actuators more than its maximum capacity.