




RECOIL

RPM365

Premium Series 3-Way
High Fidelity Component Speaker


Dimensions

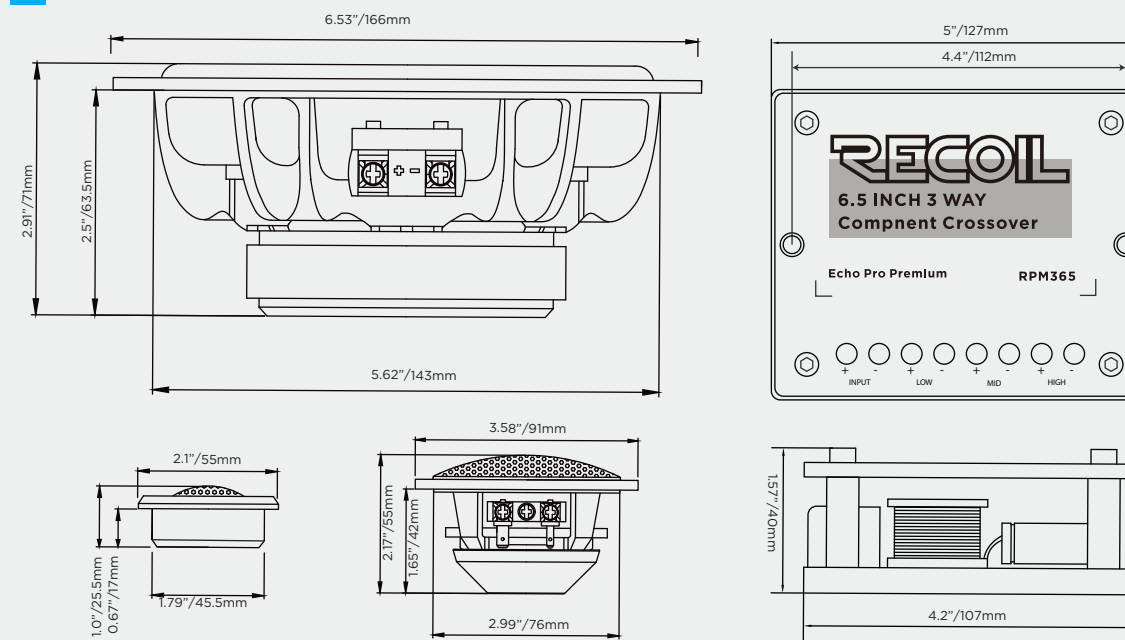


Specifications

Outer Dimensions	165mm
RMS Power	80W
Max Power	160W
Voice Coil Impedance	4.0Ω ± 15%
Resonance Frequency	63 HZ ± 10%
Sound Pressure level	88dB ± 3dB
Frequency Response	F0 ~ 20KHZ
Polarity	When a positive DC current is applied to the voice coil marked+ the diaphragm shall move forward
Operation Sine Wave	18v F0 ~ 20KHZ (Sine Wave)(2 Sce Sweep)
Load Test	80W 12Hours(sound source: Pink Noise)
Drop Test	60 cm/75°
Magnet(Woofer)	Size: 100*50*18mm Y30
Magnet(Midrange)	Size: 24.5*8mm N42 /Size:23*3mm N38(second)
Magnet (Tweeter)	Size: 24.5*4mm N42
Tweeter Dome	Silk
VC(Woofer)	Size: Φ35.5mm DCR:2.8 ± 7%Ω Φ0.23ASV/2L
VC(Midrange)	Size: Φ25.5mm DCR:3.6 ± 7%Ω Φ0.16KSV/2L
VC(Tweeter)	Size: Φ25.4mm DCR:3.4 ± 7%Ω Φ0.10ASV/2L
Frame	Material: Aluminium Color: Black
Cone/Diaphragm	Material: Paper Color: Black
Dust Coil	Material: Aluminium Color: Black
Gasket	Material: NA Color: NA
Surround	Material: NBR Color: Black
Heat Resistance	60+2°C20-25% 3Hours
Humidity Resistance	40+2°C 90-95% 3Houre

Frequency Curve

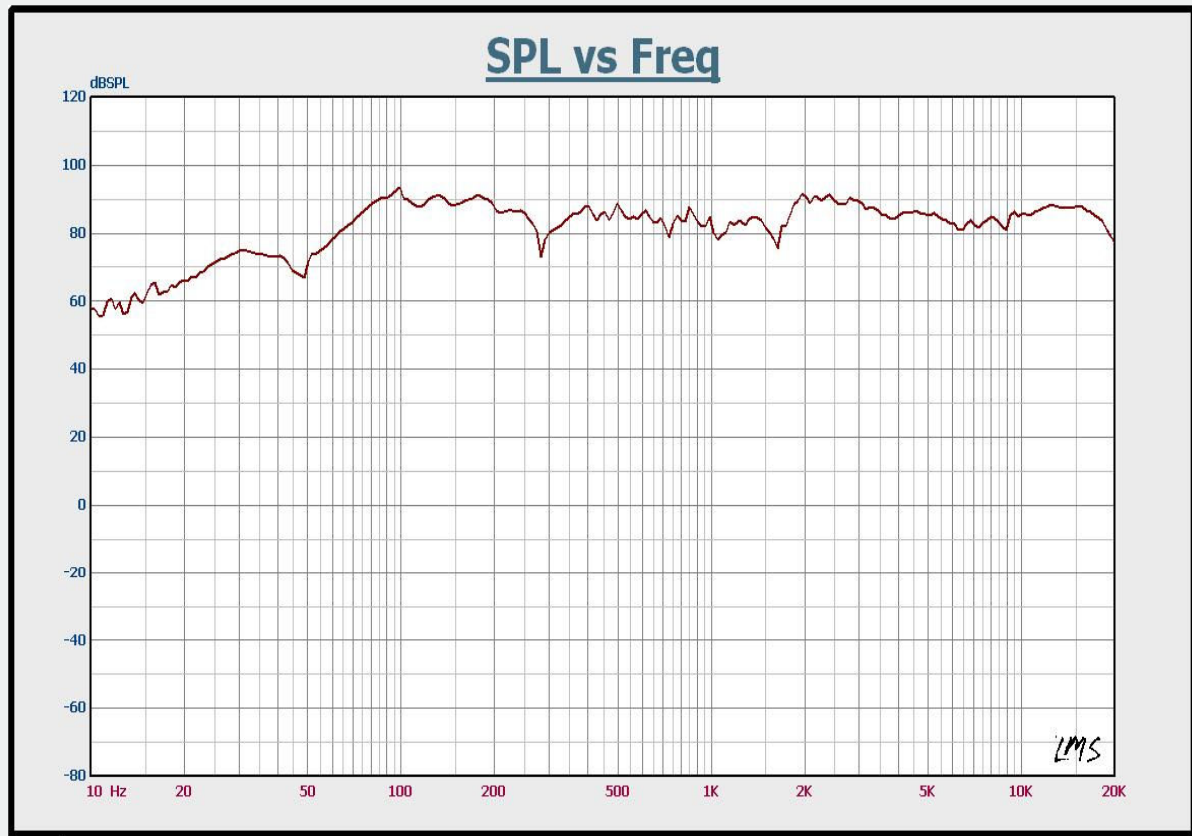

Impedance Curve

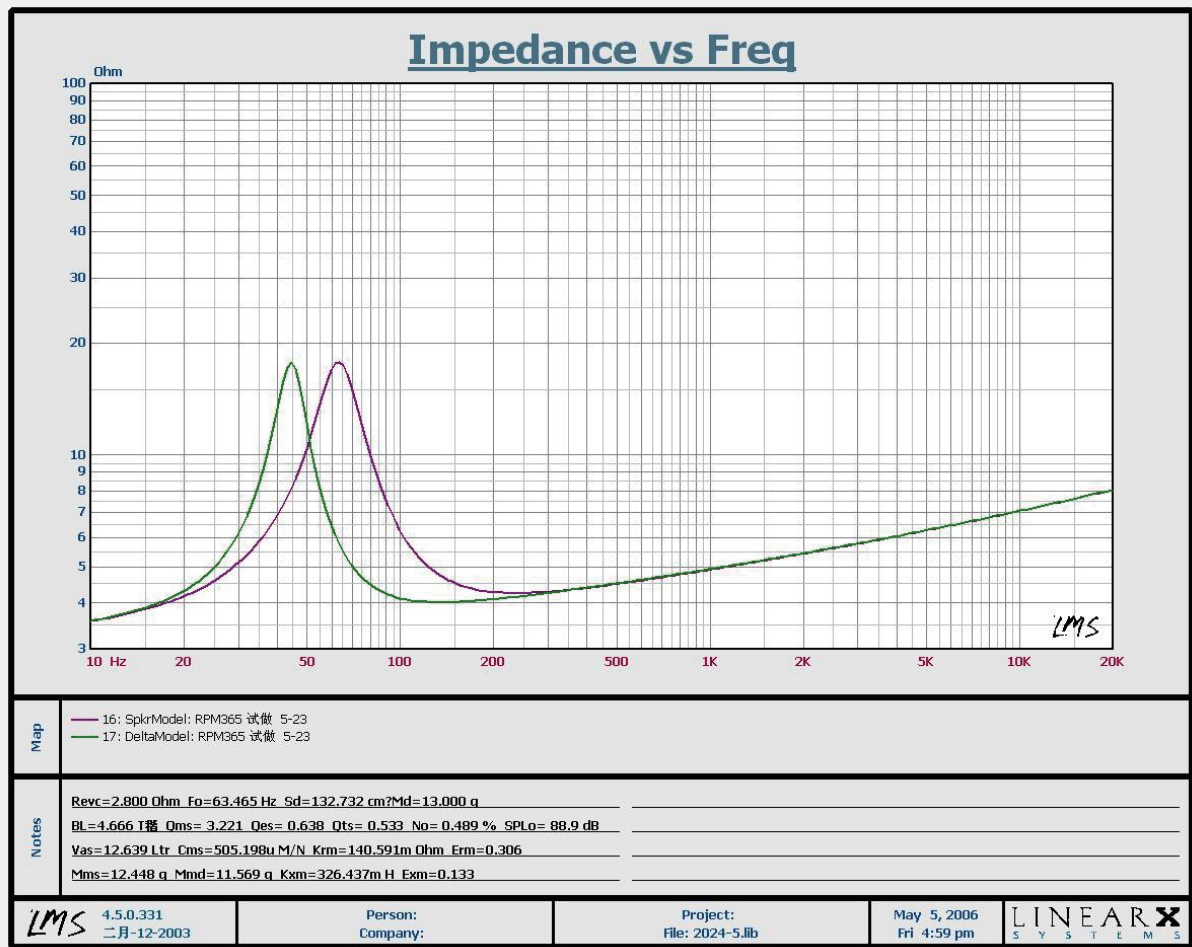

WWW.RECOILAUDIO.COM

COPYRIGHT© 2024 RECOIL ALL RIGHTS RESERVED. RECOIL, AVS INDUSTRIAL CO. LTD AND DOMESTIC INVESTMENT GROUP, LLC ASSUME NO RESPONSIBILITY OR LIABILITY FOR FINES OR DAMAGES INCURRED AS A RESULT OF IMPROPER USE OF THIS PRODUCT.