


Thank you for purchasing Recoil intelligent 4-way camera video switch. It is designed to be used with multiple cameras to show obstructions on the sides, back, or the front of the vehicle.

Automatic Mode


1. Reverse trigger display image for reverse camera.
2. Left turn signal lamp trigger display image for Left camera.
3. Right turn signal lamp trigger display image for Right camera.

Manual Mode

- To activate press the switch for the desired camera.
 - Switch will be used to active each camera.
 - One press will turn the camera on, one press will turn the camera off. (Left and right have a 5 sec. turn-off delay)
 - MODE will cancel the manual mode.
- NOTE : Front camera will be shown when rear trigger is off for 10 sec. This is normal operation.

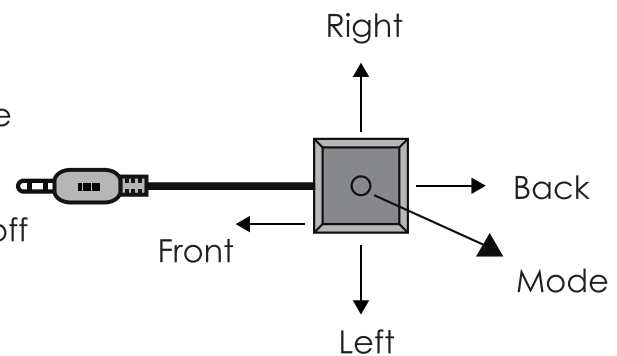

Wiring

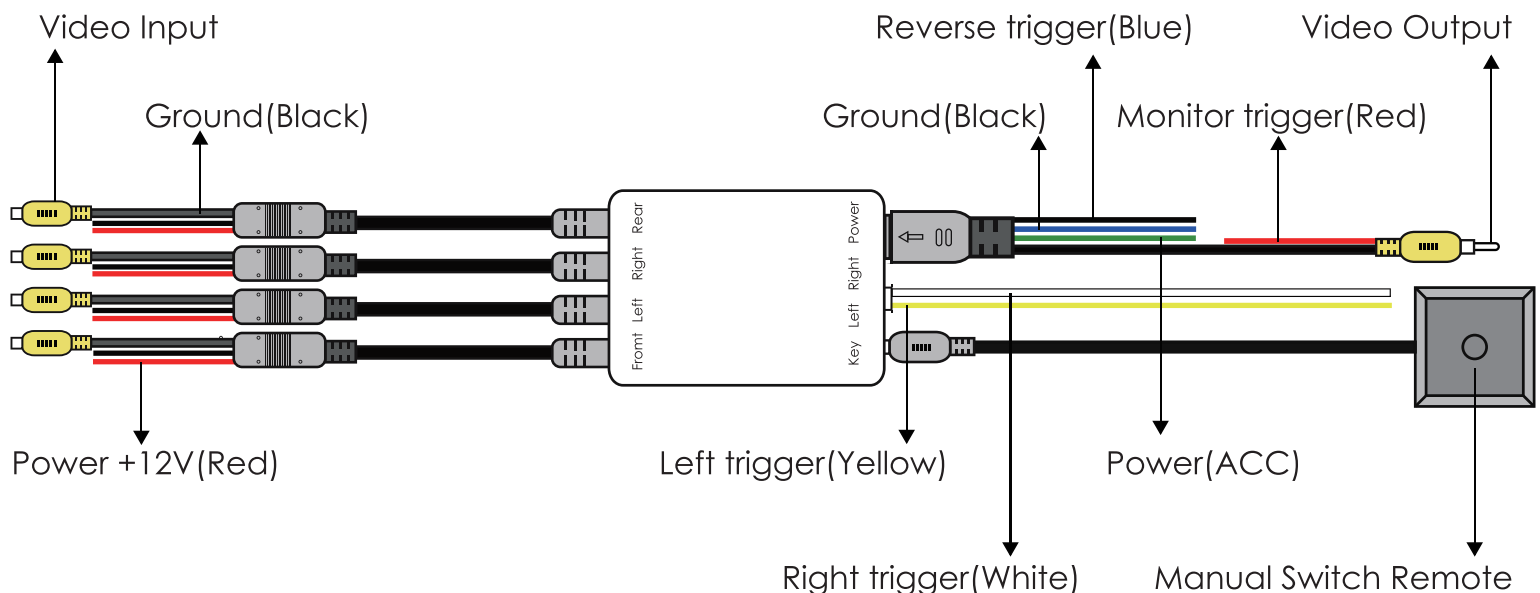

- Black - Ground
- Green - Accessory power
- Blue - Rear camera positive trigger
- Yellow - Left camera positive trigger
- White - Right camera positive trigger
- Red on male RCA - 12V positive trigger for monitor (if needed)
- Red and black on the female RCA - power and ground for cameras, will power on with the trigger or on the switch press.