




RECOIL

SPL12D1/SPL12D2

SPL Series 12-Inch Dual 1 Ohm Subwoofer

Dimensions

(Unit:mm)

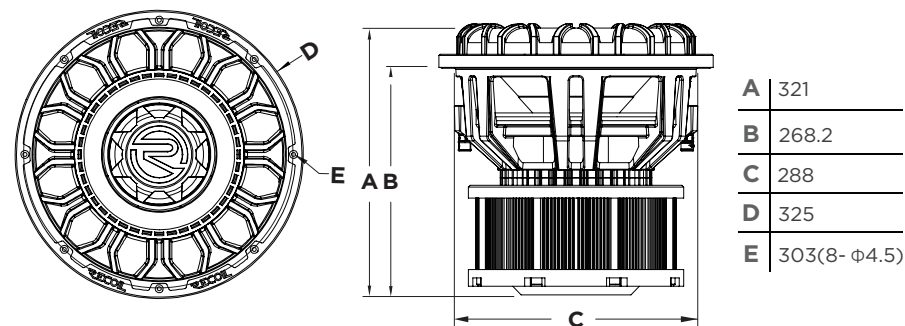


Specifications


RMS Power	2500(Watts)	DRC(Ω): 1+1/2+2(Ω)
MAX Power	5000(Watts)	X Max: 25(mm)
Basket	Material:	12" Aluminum
	Coating	Black Coating
Cone	Material:	Carbon fiber
	Coating:	Black
Surround	Material:	Foam
	Coating:	/
Dust cap	Material:	Injection PP & Paper cap (Double dust cap)
	Shape	Convex
Voice Coil	Material:	Aluminum Bobbin
	Size:	3.5"
	Wire Width:	75mm
	Layer:	4
Damper	Material:	Black PC
Magnet	Weight:	418Oz Ferrite,Φ220xΦ90x25mm 3Pieces
T-Yoke	Size:	255x20mm
	Coating:	Electrophoretic black
Washer	Size:	255x25mm
	Coating:	Electrophoretic black
Terminal	Pure Copper Terminal	
Gasket	Aluminum	
Package	MDF Wooden and Master Carton	
Tweeter	N/A	
Overall Depth	321 mm	
Mounting Depth	268 mm	
Overall Width	325 mm	
Cutout Diameter	288 mm	

TS Parameter/Curve


SPL12D1

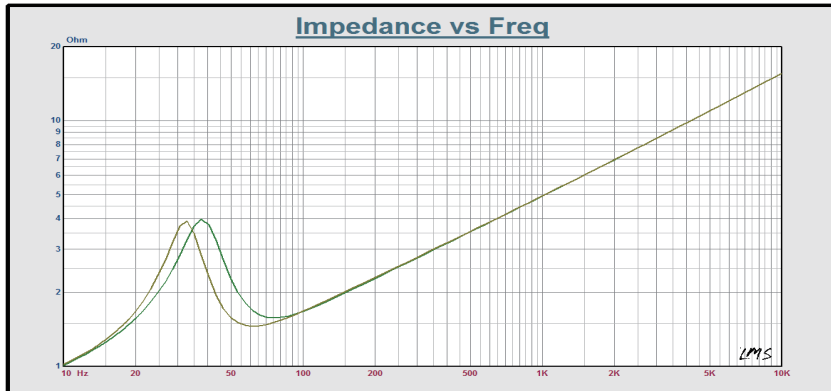

SPL12D2

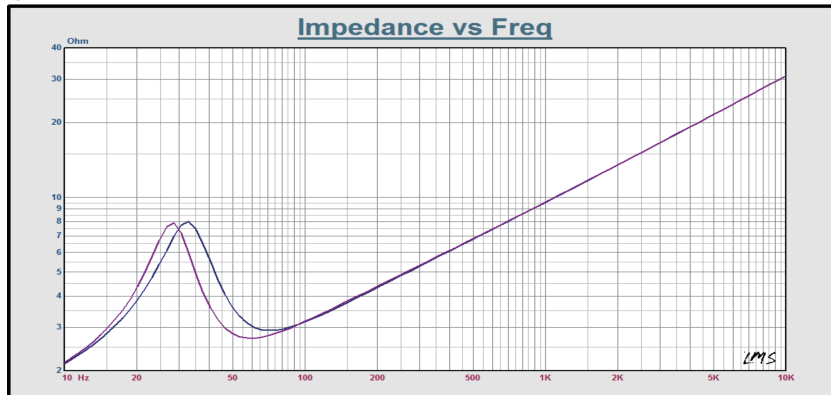

	SPL12D1	SPL12D2	
Revc	0.5	1	Ω
Fs	38.5	33	Hz
SPL	84	83	dB/W/M
Qts	0.4	0.34	N/A
Qms	2.65	2.37	N/A
Qes	0.48	0.4	N/A
Cms	43.7	52.9	um/N
No	0.148	0.132	%
Mms	390.1	440	g
Sd	452.4	452.4	cm ²
BL	9.9	15	T-m
Vas	12.7	15.4	L

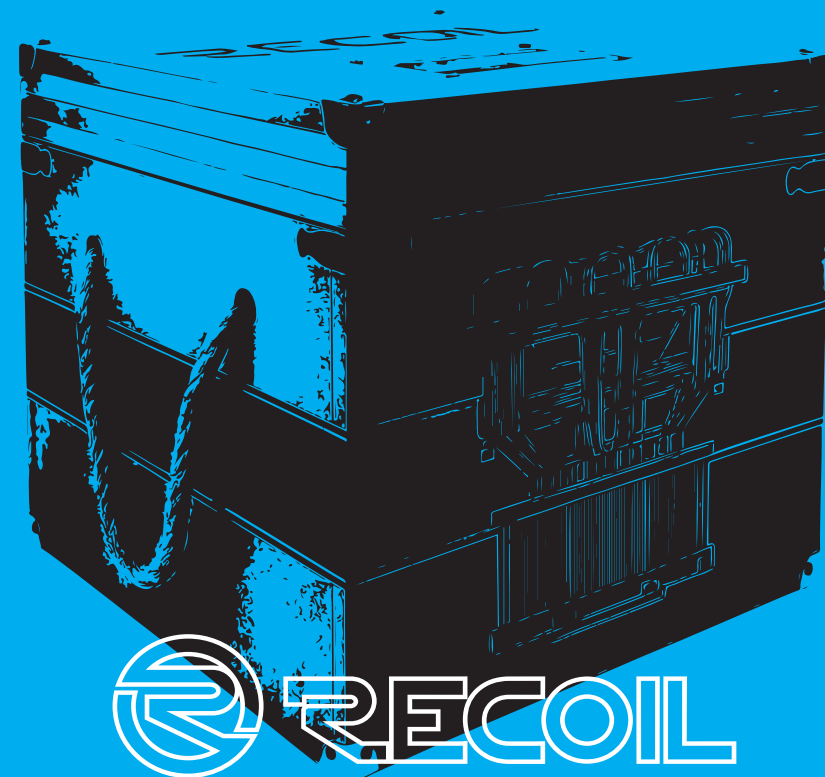

WWW.RECOILAUDIO.COM

COPYRIGHT© 2025 RECOIL ALL RIGHTS RESERVED. RECOIL, NINGBO AVS TECHNOLOGY CO., LTD AND DOMESTIC INVESTMENT GROUP, LLC ASSUME NO RESPONSIBILITY OR LIABILITY FOR FINES OR DAMAGES INCURRED AS A RESULT OF IMPROPER USE OF THIS PRODUCT.