



**Recoil Red Storm Series 6"x9"4-Way Coaxial Speaker**

## User Manual

### **INSTALLATION**

Congratulations on your purchase of our product! We hope RECOIL AUDIO will delight you with its impressive performance. In producing our speakers, we utilize high-quality components and cutting-edge materials. This manual contains essential instructions for proper system installation and use. Before installation, please carefully review all guidelines provided. Failure to follow these instructions may result in product damage or unintended malfunctions.



### **SPECIFICATIONS**

Size: 6x9"(165x236mm)  
RMS Power : 60 W  
Max Power: 120 W  
Nominal Resistance (Ohm) : 4 Ω  
Minimum Resistance (Ohm) : 3.4 Ω  
Sensitivity (1W/M) : 87 dB(+/-3dB)  
Frequency Range: 48-20kHz  
Cone Material: IMPP  
Suspension Material: Santoprene  
Voice Coil Diameter: 30.5 mm (1.2")  
Coil Material: KSV  
Magnet Material : Ferrite(14 OZ)  
1x50mm Mylar Midrange  
2x20mm Piezo Super Tweeter

### **T/S PARAMETERS**

Fs 79 Hz  
Re 3.6 ohm  
Qes 0.82  
Qms 2.77  
Qts 0.63  
Vas 9.9 L  
Sd 128.68 cm<sup>2</sup>  
X Max 2.7 mm  
Mms 9.5 g  
Bl 4.57 T.m  
No 0.586 %  
CMS 421 uM/N

## Dimension

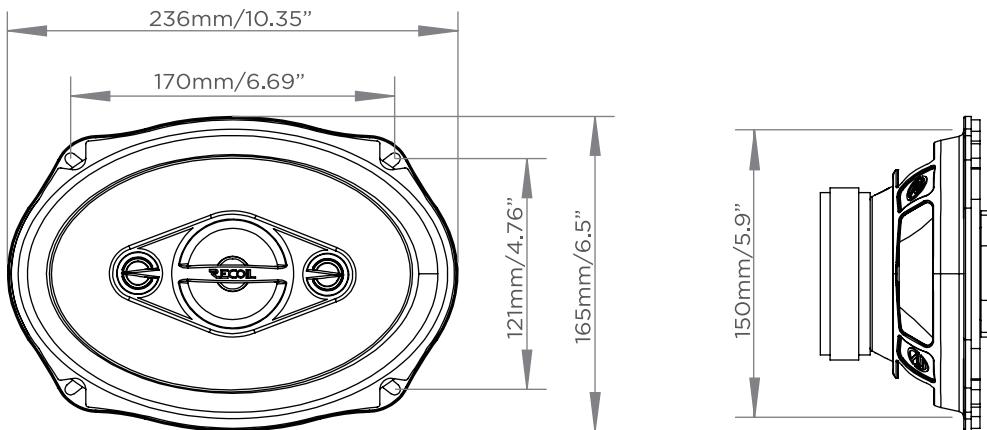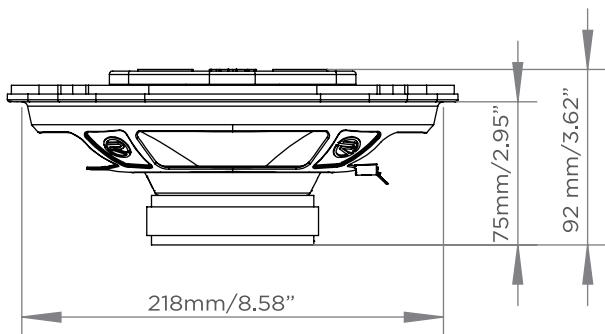

## List of Articles

①		x2	②		x2	③		x8	④		x1
---	--	----	---	--	----	---	--	----	---	--	----