


RECOIL

RPT28

ECHO MAX SERIES

Hi-Fi Rear Chamber Tweeter

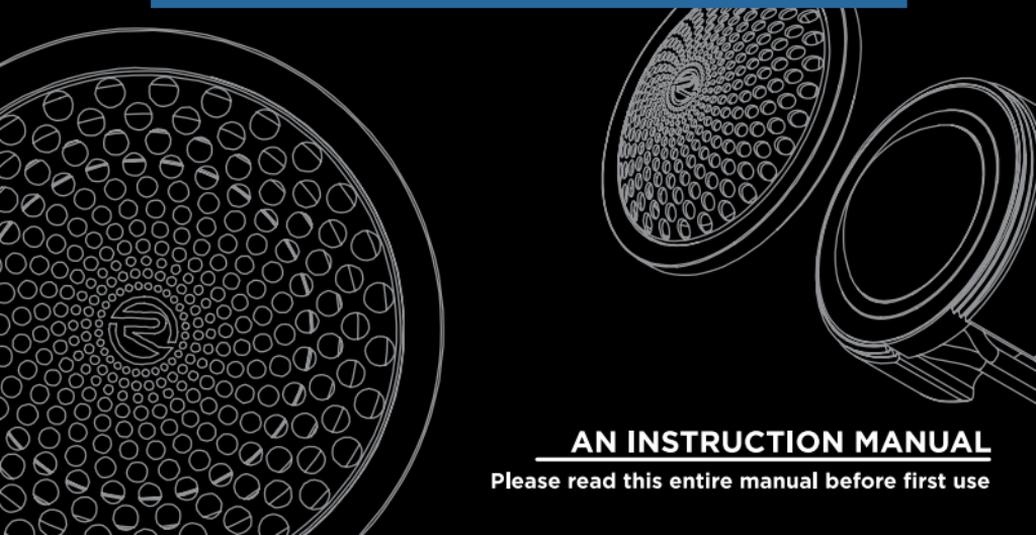



AN INSTRUCTION MANUAL

Please read this entire manual before first use

FEATURES

- Peak Power: 50 Watts | RMS Power: 25 Watts
- 1.1"/28mm CCAW 4-Ohm Voice Coil | Aluminium Bobbin
- Silk Soft Dome Diaphragm
- Double Neodymium Magnet (N42H)
- Rear Chamber with Built-in Sound-absorbing Material
- Equipped with High-performance Audio Capacitor
- Full Aluminium Housing for Superior Heat Dissipation
- Compact Installation Size with Detachable Grille Design

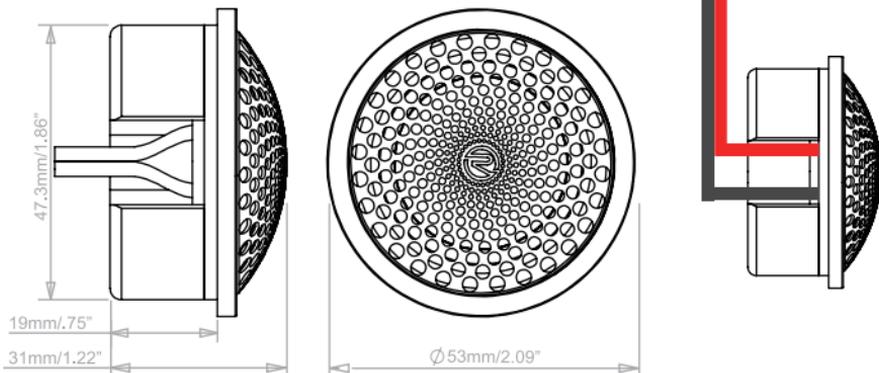

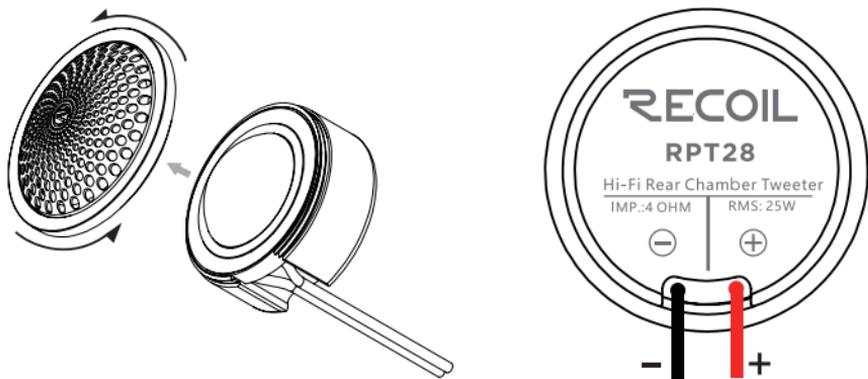

RPT28 Tweeter grille Removal for Smaller Installation:

If you require a smaller mounting diameter or wish to install the tweeter into the factory A-pillar sail panel location, the RPT28 allows for bezel removal. Simply rotate the bezel counterclockwise to detach it along with the integrated grille.

This reduces the mounting diameter to 47mm (1.85"), enabling compatibility with a wider range of factory tweeter locations.

Hi-Fi Rear Chamber Tweeter

RPT28

Parameters

Diameter	Impedance	Rated Power	Max Power
∅53mm/2.09"	4Ω	25W	50W
Voice Coil	Sensitivity	Frequency Response	Dome
∅1.1"/28.5mm	90dB/M/W	1.5KHz-22KHz	SILK

Frequency Response Curve

