



**L-3 Series Pro Horn Coaxial
6.5" Speaker with Bullet Tweeter**

User Manual

INSTALLATION

Congratulations on your purchase of our product! We hope RECOIL AUDIO will delight you with its impressive performance. In producing our speakers, we utilize high-quality components and cutting-edge materials. This manual contains essential instructions for proper system installation and use. Before installation, please carefully review all guidelines provided. Failure to follow these instructions may result in product damage or unintended malfunctions.

SPECIFICATIONS

Size: 165mm (6.5")

Minimum Input (RMS) : 120 W

Peak Power: 240 W

Nominal Resistance (Ohm) : 4 Ω

Minimum Resistance (Ohm) : 3.3 Ω

Sensitivity (1W/M) : 93 dB(+/-3dB)

Frequency Range: 132-20 kHz



Cone Material: Pressed Paper Fiber

Suspension Material: Cloth

Voice Coil Diameter: 38.5 mm (1.5")

Coil Material: KSV

Magnet Material : Ferrite(19.2OZ)

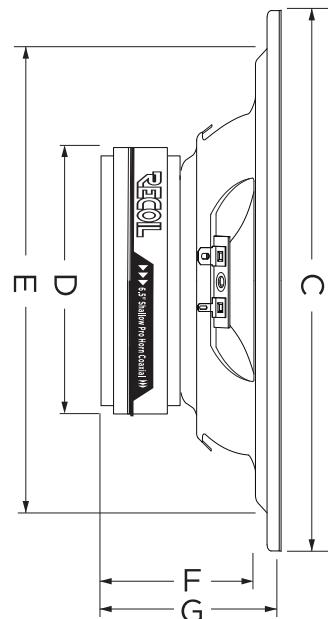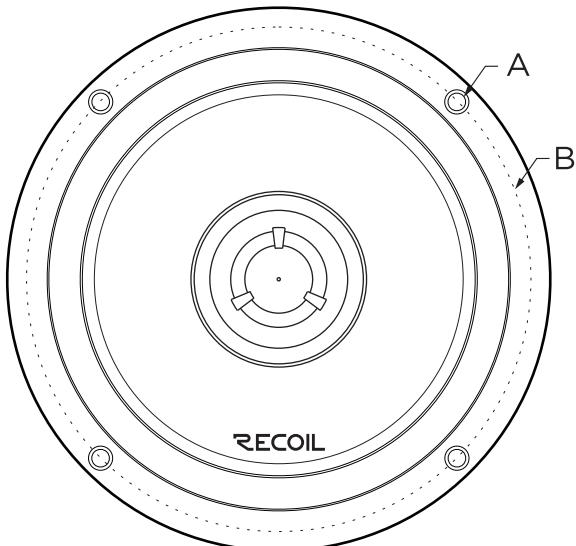

T/S PARAMETERS

Fs 132 Hz
 Re 3.2 ohm
 Qes 1.22
 Qms 9.31
 Qt 1.08
 Vas 4.39 L
 Sd 13.9 cm²
 X max 0.5 mm
 Mms 7.12g
 Bl 4.18Tm
 No 1.15%
 CMS 160.2uM/N

Dimension

Item	LX65-4P (mm)
A	4-φ4.5
B	φ157
C	φ165
D	φ110
E	φ143
F	51
G	57