



User Manual

INTRODUCTIONS

Congratulations on your purchase of our product! We hope RECOIL AUDIO will delight you with its impressive performance. In producing our speakers, we utilize high-quality components and cutting-edge materials. This manual contains essential instructions for proper system installation and use. Before installation, please carefully review all guidelines provided. Failure to follow these instructions may result in product damage or unintended malfunctions.

SPECIFICATIONS

EM65-4P

Size: 165mm (6.5")

Rms Power: 60 W

Max Power: 120 W

Nominal Resistance (Ohm) : 4 Ω

Minimum Resistance (Ohm) : 3.4 Ω

Sensitivity (1W/M) : 91 dB(+/-3dB)

Frequency Range: 133-6 kHz

Cone Material: Pressed Paper Fiber


Suspension Material: Cloth

Voice Coil Diameter: 25.5 mm (1.0")

Coil Material: KSV/CCAW

Magnet Material : Ferrite(10 OZ)

Dimension

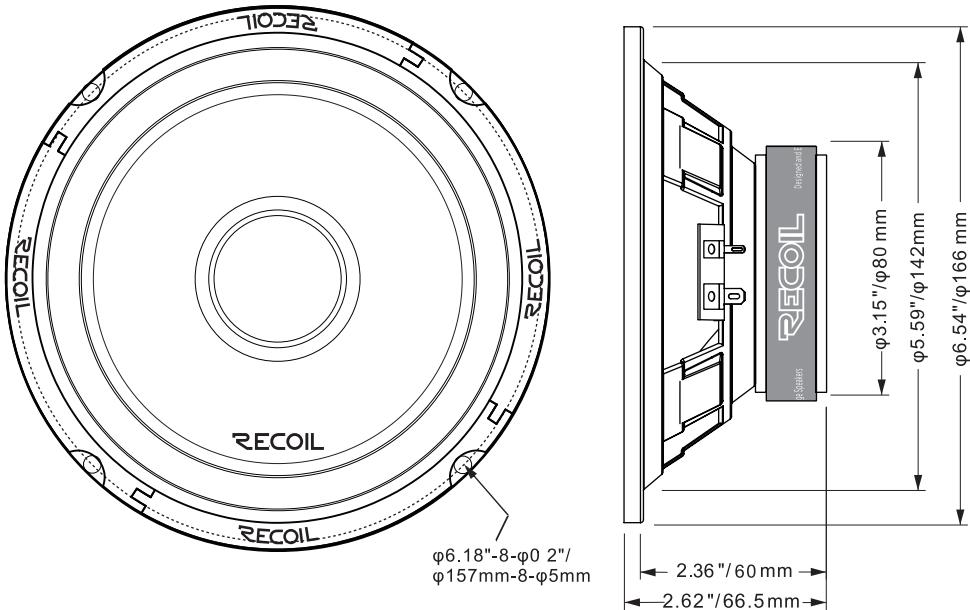

T/S PARAMETERS

Fs 133 Hz	Sd 136.8 cm ²
Re 3.4 ohm	X max 1mm
Qes 1.34	Mms 6.7g
Qms 6.14	Bl 3.2T-m
Qts 1.34	No 0.74%
Vas 5.6 L	CMS 0.22 mm/N

COPYRIGHT© 2025 RECOIL ALL RIGHTS RESERVED. RECOIL, NINGBO AVS TECHNOLOGY CO., LTD AND DOMESTIC INVESTMENT GROUP, LLC ASSUME NO RESPONSIBILITY OR LIABILITY FOR FINES OR DAMAGES INCURRED AS A RESULT OF IMPROPER USE OF THIS PRODUCT.

