



User Manual

INTRODUCTIONS

Congratulations on your purchase of our product! We hope RECOIL AUDIO Acoustics will delight you with its impressive performance. In producing our speakers, we utilize high-quality components and cutting-edge materials. This manual contains essential instructions for proper system installation and use. Before installation, please carefully review all guidelines provided. Failure to follow these instructions may result in product damage or unintended malfunctions.

SPECIFICATIONS

RMS Power : 30 W

Max Power: 60 W

Nominal Resistance (Ohm) : 4 Ω

Minimum Resistance (Ohm) : 3.2 Ω

Sensitivity (1W/M) : 105 dB(+/-3dB)

Frequency Range: 4k-20 kHz

Diaphragm Material: Auminum


Voice Coil Diameter: 25.5 mm (1.0")

Coil Material: KSV

Magnet Material : Neodymium Magnet



SIZE AND INSTALLATION

Flat installation

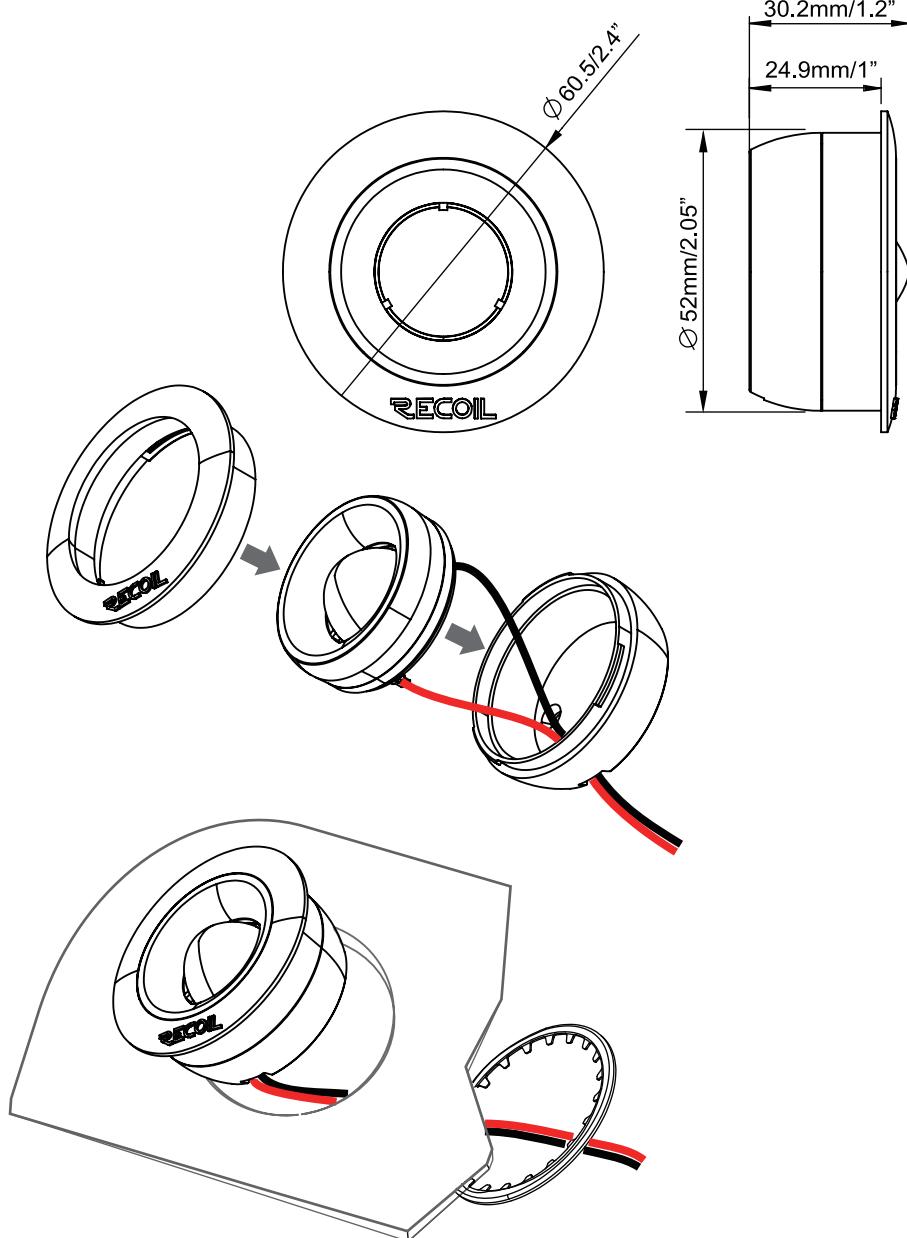


SIZE AND INSTALLATION

inclined installation

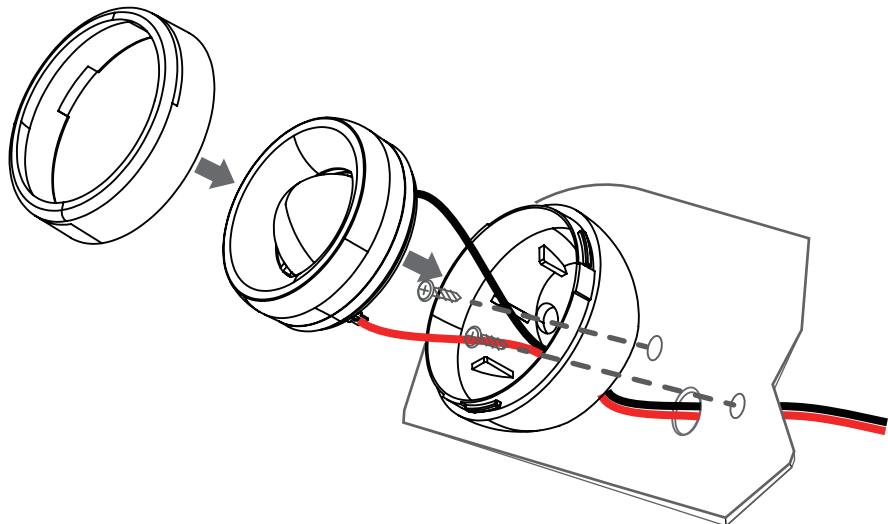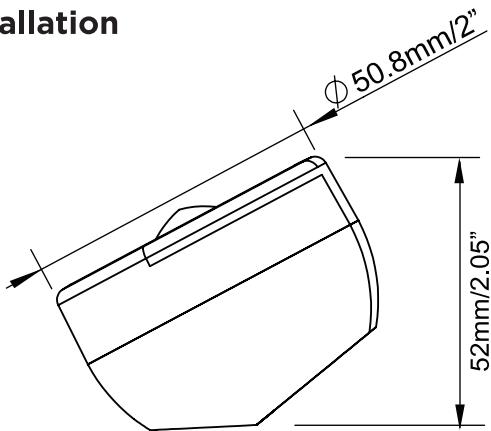

Parameters/Frequency Response Curve

Diameter	Impedance	Rated Power	Max Power
Ø60mm/2.36"	4Ω	30W	60W
Voice Coil	Sensitivity	Frequency Response	Diaphragm
Ø1.0"/25.5mm	105dB/M/W	4KHz-20KHz	Auminum

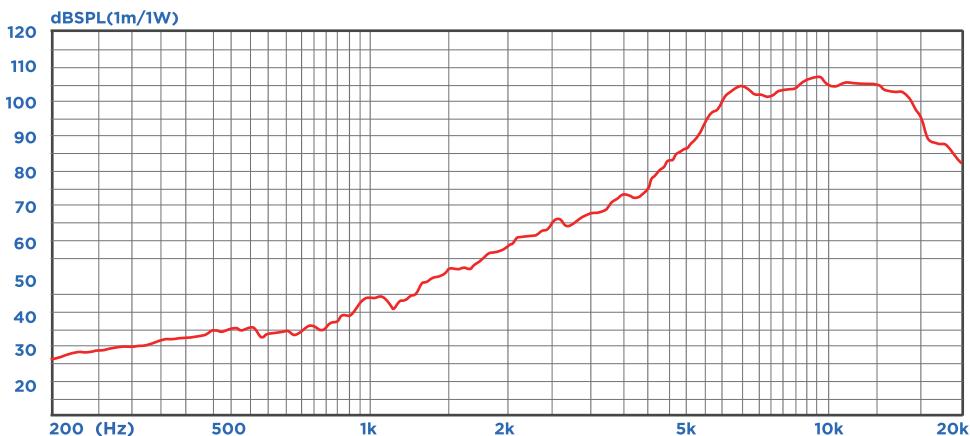

WWW.RECOILAUDIO.COM

COPYRIGHT© 2025 RECOIL ALL RIGHTS RESERVED. RECOIL, NINGBO AVS TECHNOLOGY CO., LTD AND DOMESTIC INVESTMENT GROUP, LLC ASSUME NO RESPONSIBILITY OR LIABILITY FOR FINES OR DAMAGES INCURRED AS A RESULT OF IMPROPER USE OF THIS PRODUCT.