



# RL 1100.5 USER MANUAL

**RECOIL**  
WWW.RECOILAUDIO.COM


## RL 1100.5

### INTRODUCTION

Thank you for purchasing Recoil amplifier RL1100.5 for your car audio system. You have chosen Recoil because you deserve the best! Please thoroughly read through this manual before getting started. If you have any questions and require additional assistance, please contact support@recoilaudio.com.

- Designed with advanced power MOSFETs from International Rectifier
- High/Low Input modes
- Overload, thermal, voltage, speaker short, and DC-offset protection circuitry
- Switched turn on options (VOX/DC/REM)
- Wired remote control included

### FRONT PLATE

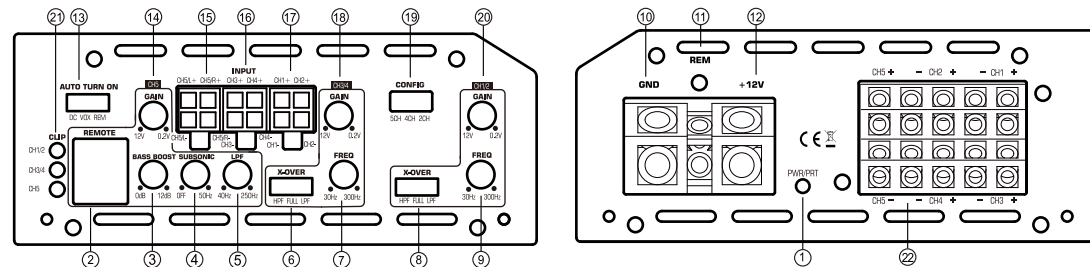

#### 1. Protection/Power LED Indicator

When Protection LED lights up in RED color, Amplifier might be in protection mode or malfunction. Please shut down the amplifier immediately. This Power LED will light up in BLUE color when amplifier is turned on.

#### 2. Remote Control

This port is for the remote level control. It allows the user to control bass level from your driver's seat.

#### 3. CH5 Bass Boost

Increases the bass level by 12dB.

#### 4. CH5 Subsonic

This control allows you to remove the unwanted sub-sonic frequencies below the tuning frequency.

#### 5. CH5 Low Pass Filter

Adjust the knob to set up tuning frequency, this control blocks the frequencies above the tuning frequency.

#### 6.CH3/4 Crossover Selector

This switch allows you to select the crossover. Select HPF (high pass filter) for midrange or tweeters. Select LPF (low pass filter) for mid-bass or subwoofers. Select FULL to full frequency signal.

#### 7. CH3/4 Frequency Filter

Set up the crossover frequency. When select HPF, all frequencies below the setup will be blocked; When select LPF, all frequencies above the setup will be blocked;

#### 8. CH1/2 Crossover Selector

This switch allows you to select the crossover. Select HPF (high pass filter) for midrange or tweeters. Select LPF (low pass filter) for mid-bass or subwoofers. Select FULL to full frequency signal.

#### 9.CH1/2 Frequency Filter

Set up the crossover frequency. When select HPF, all frequencies below the setup will be blocked; When select LPF, all frequencies above the setup will be blocked;

#### 10. Ground Input

Locate a secure grounding connection as close to amplifier as possible. Make sure the location is clean and provides a direct electrical connection to the frame of the vehicle. The ground needs to have as low of a resistance as possible. Connect one end of a short piece of the same size cable as the power cable to the grounding point or to one of your batteries or battery bank. Run the other end of 4 ga cable to the mounting location of the amplifiers for connection to the amplifiers ground terminals and connect the ground cable to the GND (ground terminal).

#### 11. Remote Input

Run a remote turn on cable from the switched 12V source. This may be a toggle switch, a relay, your source unit's remote trigger cables, or power antenna trigger cable. Connect the remote turn on cable to the REM (remote) terminal.

#### 12. Battery+ (12V) Input

Before mounting amplifiers, disconnect the negative cable from the battery to protect any accidental damage to your amplifiers and audio system. Connect the power cables to power terminal 12V. Connect one end of the fuse holder to the power cable running to the amplifier, and the other end to the positive battery terminal. This fuse location will protect the system and the vehicle against the possibility of a short circuit in the power cable. Be sure to use fuses and fuse holder adequate for the application.

#### 13. Turn On Selector

REM: Connect to REM to turn on amplifier.

DC: High level signal input to turn on amplifier. (DC offset)

VOX: Audio frequency input to turn on amplifier.

#### 14. CH5 Gain

This gain control is preset to match the output of source units.

#### 15. CH5 Audio Input


The jacks allow for a normal Left and Right channel signal input. Simply connect to the source unit using audio cables, keeping them away from power wiring wherever possible to reduce risk of noise.

#### 16. CH3/4 Audio Input


The jacks allow for a normal Left and Right channel signal input. Simply connect to the source unit using audio cables, keeping them away from power wiring wherever possible to reduce risk of noise.

17. CH1/2 Audio Input  
The jacks allow for a normal Left and Right channel signal input. Simply connect to the source unit using audio cables, keeping them away from power wiring wherever possible to reduce risk of noise.
- 18.CH3/4 Gain  
The input gain control is preset to match the output of most source units.
19. Config (Source Selection)  
This switch allows the amplifier to be driven with either 2 or 4 or 5 pairs of inputs.
- 20.CH1/2 Gain  
The input gain control is preset to match the output of most source units.
- 21.Clip LED Indicator  
When this LED lights up, it indicates clipping is present. At this point, please adjust the amplifiers gain level until the CLIP LED is gone.
22. Speaker Outputs  
Connect speaker wire from amplifier's terminal block to Speaker. Speakers' impedance should be checked carefully.

WIRING DIAGRAM

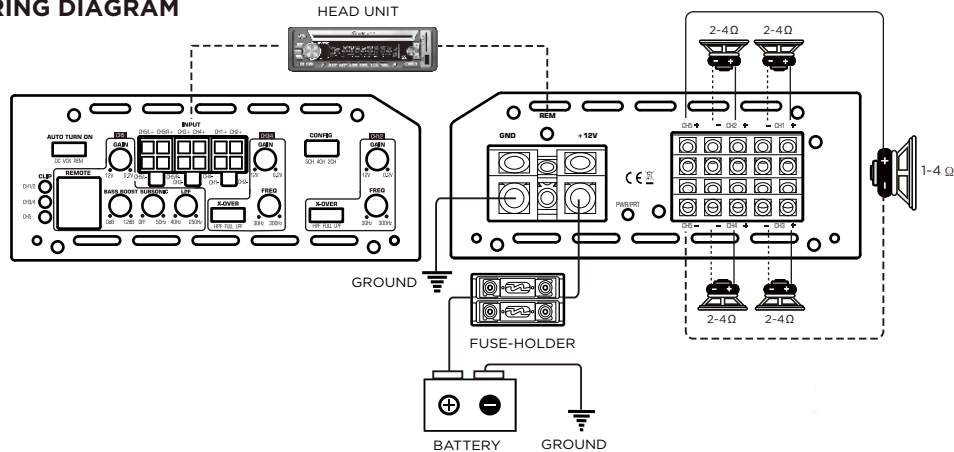

DIMENSIONS

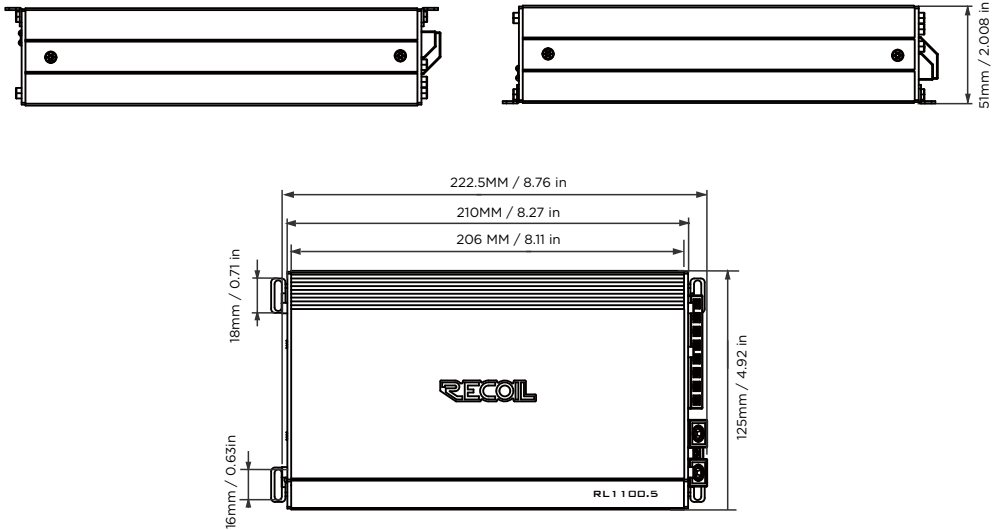

SPECIFICATIONS

|                                 |                                 |
|---------------------------------|---------------------------------|
| RMS @4 OHM(THD<1%DISTORTION)    | 80 W x 4+250W                   |
| RMS @2 OHM(THD<1%DISTORTION)    | 140 Wx 4+420W                   |
| RMS @1 OHM(THD<1%DISTORTION)    | N/A(CH1-CH4)<br>600W(CH5)       |
| Frequency Response              | 20Hz-20kHz                      |
| Signal To Noise Ratio           | 90dB                            |
| THD                             | ≤0.5%                           |
| Input Sensitivity Level         | 12V-0.2V                        |
| Best Efficiency                 | >80%                            |
| Minimum Load                    | N/A(CH1-CH4)<br>600W(CH5)       |
| Current Draw                    | 100A                            |
| Short Circuit Test (max. power) | PASS                            |
| Overload Protection System      | YES                             |
| Overheat Protection Temperature | 75℃                             |
| Dimension(LxWxH)                | 8.27X4.92X2 in<br>210X125X51 mm |



RECOIL  
WWW.RECOILAUDIO.COM